"Stay Connected" with **HEYCO**[®]



a PennEngineering[®] Company



Stainless steel mini clip "bites" into panel, chassis or module edges.
Ideal for use where holes cannot be used or where adhesives are

Applies easily to plastic and metal without the need for a mounting hole.
Ideal for assembly usage. Clip provides low insertion force and high extraction.
Two piece assembly allows the clip to

unacceptable due to temperature issues.

slide along the strap ensuring proper

orientation.

HEYBite Mini's®

Unassembled or Assembled with 8" Cable Tie

HEYBite Mini's[®] - Stainless Steel with Nylon 6/6 Cable Tie, 8" Long


UNASSEMBLED EDGE CLIP			EDGE CLIP ASSEMBLED WITH CABLE TIE			ASSEMBLED NYTYE CABLE TIE						
Fixing	Part No.	Description	Cable Tie	Part No.	Description	Tensile Strength Lbs. N		Max. Bundle Dia.		Overall		
	Stainless		Orientation	Stainless/Black				in.	mm.	Length in. ∣ mm.		
For Panels from .06" (1,5mm) to .13" (3,3mm) Thick												
Тор	S6474	SunRunner CT	Perpendicular	S14275	S6474-TP-50-078	50	222	1.77	45,0	7.87	200	
iop			Parallel	S14276	S6474-TL-50-078							
For Panels from .13" (3,3mm) to .25" (6,4mm) Thick												
Тор	S6475	SunRunner CT-EZ	Perpendicular	S14280	S6475-TP-50-078	50	222	1.77	45,0	7.87	200	
			Parallel	S14281	S6475-TL-50-078							

Standard color black.


HEYBite Mini's $^{\!\circ}$ - Stainless Steel with Nylon 12 Cable Tie, 8" Long

UNA	SSEMBLED	EDGE CLIP	EDGE CLIP ASSEMBLED WITH CABLE TIE			ASSEMBLED NYTYE CABLE TIE						
Fixing	Part No.	Description	Cable Tie	Part No.	Description	Tensile		Max. Bundle Dia.		Overall		
	Stainless		Orientation	Stainless/Black		Stre Lbs.	ngth N	in.	mm.	Le in.	ngth mm.	
For Panels from .06" (1,5mm) to .13" (3,3mm) Thick												
Тор	S6474	SunRunner CT	Perpendicular	S14275-12	S6474-TP-50-078-12	50	222	1.77	45,0	7.87	200	
			Parallel	S14276-12	S6474-TL-50-078-12							
For Panels from .13 ["] (3,3mm) to .25 ["] (6,4mm) Thick												
Тор	S6475	SunRunner CT-EZ	Perpendicular	S14280-12	S6475-TP-50-078-12	50	222	1.77	45,0	7 07	200	
			Parallel	S14281-12	S6475-TL-50-078-12					7.87	200	

PERPENDICULAR



S14275, S14280, S14275-12, S14280-12

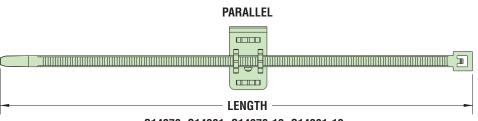

S14276, S14281, S14276-12, S14281-12



Material

Flammability Rating Temperature Range S6474 & S6475 Clips: 304 stainless steel Cable Tie: Nylon 6/6 high impact modified, heat and UV stabilized or Nylon 12 94V-2 -40°F (-40°C) to 221°F (105°C)