a PennEngineering® Company



- Helps protect solar panels from rodents and nesting birds with wire mesh screening (screening not included). See Heyco Sunscreen below.
- Constructed from 303 and 304 Stainless Steel for maximum endurance to outdoor elements.
- 303 Stainless Steel J-Hook easily attaches to the solar panel frames and can easily be trimmed or bent after assembly.
- 304 Stainless Steel Washers will firmly hold wire mesh screen to the module assembly preventing squirrels and rodents from damaging the interconnection wires and birds from building nests under the solar panel.
- Does not violate panel integrity.
- Installs quickly and easily with standard linesman pliers
- Black color available for those applications subject to HOA appearance restrictions.
- Stainless Steel Washers are offered in both steel color and black painted versions.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant


PART NO.	PART DIMENSIONS			
Black	Width	Length		
	in.	feet		
S6464	4	100′		
S6466	6	100′		
S6468	8	Rolls		

- Mesh dimension is 1/2" x 1/2".
- DFARS Compliant
- For SunScreener Clips and SunScreen Mesh bundled in **Kit** form, see page 1-33.



Heyco[®] SunScreener[®] Wire Mesh Clip


PART		PART DIMENSIONS CLIP DIMENSIONS										
Steel		A		В		C		D		E		
Gray	Gray Black		Length	h Diameter		Width		Height		Washer Diameter		
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
Stainless Steel												
\$6437	\$6438	4.87	124,0	.08	2,0	.38	9,7	.38	9,7	1.00	25,4	

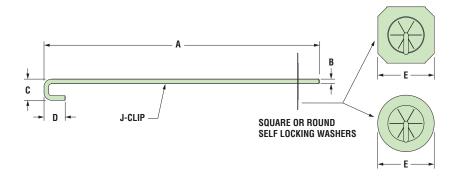

Heyco® SunScreen®

Wire Mesh - For use with Heyco SunScreener Clips





SunScreener Wire Mesh Clip Material 303 Stainless steel J-Hook 304 Stainless steel Washer

SunScreen Wire Mesh PVC Coated, galvanized welded steel mesh