

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




Heyco® SunStrap

PVC Coated Stainless Steel Strap

| PART SPECIFICATIONS | | | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | |
|-----------------------|-----|----------------------|------|--------------|-------------|-----------------|-------|------------|-----|
| Max. Tensile Strength | | Max. Bundle Diameter | | | | A Length | | B Diameter | |
| Lbs. | N | in. | mm. | | | in. | mm. | in. | mm. |
| 200 | 890 | 2.0 | 50,8 | S6608 | SunStrap 8 | 8 | 203,0 | .25 | 6,4 |
| | | 3.0 | 76,2 | S6612 | SunStrap 12 | 12 | 304,8 | | |

- Heavy Duty construction for harsh environments.
- 200 pounds pull force.
- Releasable and reusable.
- Tensile Strength shown is based on Max Bundle Diameter.
- Larger bundle diameters possible; will affect tensile strength

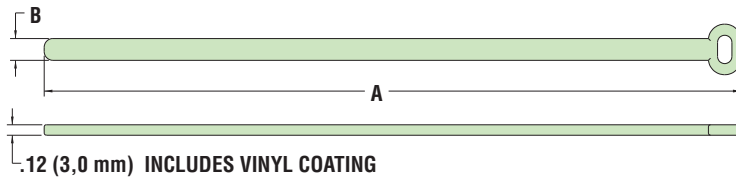

Material PVC Coated stainless steel
 Temperature Range -40°F (40°C) to 194°F (90°C)

*Quick
Specs*