




Heyco® RDD Lockit™ Strain Relief Bushings – Straight-Thru

Snap onto **Flat Cables** for Faster Assembly into **Double D Mounting Holes** – *Semi-Automatic Equipment Available*

- **Assembly friendly!** Independent of insertion into the panel, RDD Lockit™ Strain Reliefs **self-lock** onto the cable. Preassemble RDD Lockits off line for final assembly at a later time or remote location, for lower installed cost!
- Install easily with fingertip pressure into a standard round or Double D hole. No tools required, even for hand assembly.
- Protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. Double D design eliminates the possibility of part rotation under forces of twist.
- Multiple panel locking steps secure Lockit Strain Reliefs into a wide range of panel thicknesses for a **flush, finished fit**.
- Heyco’s automated Pre-Assembly Equipment speeds assembly of the RDD onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.
- **For Quick Specs see page 4-12.**
- For Double D Mounting Hole Punches, see page 4-30.

UL Type	WILL FIT THESE CABLES		PANEL DIMENSIONS				RDD LOCKIT STRAIN RELIEF for Faster Assembly		Corresponding Mounting Hole Plug			
	AWG/Conductors	Approximate Size in. mm.	Mounting Hole Size in. mm.		Thickness in. mm.		Black	White	PART NO.	DESC.		
SPT-1	18/2 18/3	.105 x .222 .116 x .315	2,7 x 5,6 2,9 x 8,0	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032	0,8	1872	1873	RDD 100A	2497	DD 625-550
						.040	1,0					
						.048	1,2					
						.063	1,6					
						.099	2,5					
SPT-2, HPN	18/2 18/3 16/3	.116 x .315 .160 x .300	2,9 x 8,0 4,1 x 7,6	.625 w/ .550 flats	15,9 w/ 14,0 flats	.032	0,8	1874	1875	RDD 100	2497	DD 625-550
						.040	1,0					
						.048	1,2					
						.063	1,6					
						.099	2,5					
HPN	18/3 16/3	.15 x .34 .16 x .37	3,8 x 8,6 4,1 x 9,4									
SPT-2	18/3 16/3	.15 x .40 .16 x .41	3,8 x 10,2 4,1 x 10,4			.032	0,8					
						.063	1,6					
SPT-3	18/2 18/3 16/2 16/3 14/2	.19 x .35 .19 x .39 .20 x .37 .20 x .43 .24 x .42	4,8 x 8,9 4,8 x 9,9 5,1 x 9,4 5,1 x 10,9 6,1 x 10,7	.875 w/ .770 flats	22,2 w/ 19,6 flats	.032	0,8	1878	1879	RDD 200	2509	DD 875-770
						.063	1,6					
						.099	2,5					
						.126	3,2					
						.157	4,0					
Same as RDD 200 above except →						.078	2,0	1876	1877	RDD 200-2*	2509	DD 875-770
Same as RDD 200 above except →						.063	1,6	1798	1799	RDD 510	2717	DD 1109-1000
						.099	2,5					
						.126	3,2					
						.157	4,0					
						.187	4,8					


Standard color black. Consult Heyco for white and other colors.
*Designed for cast or other mounting holes with rounded edges.

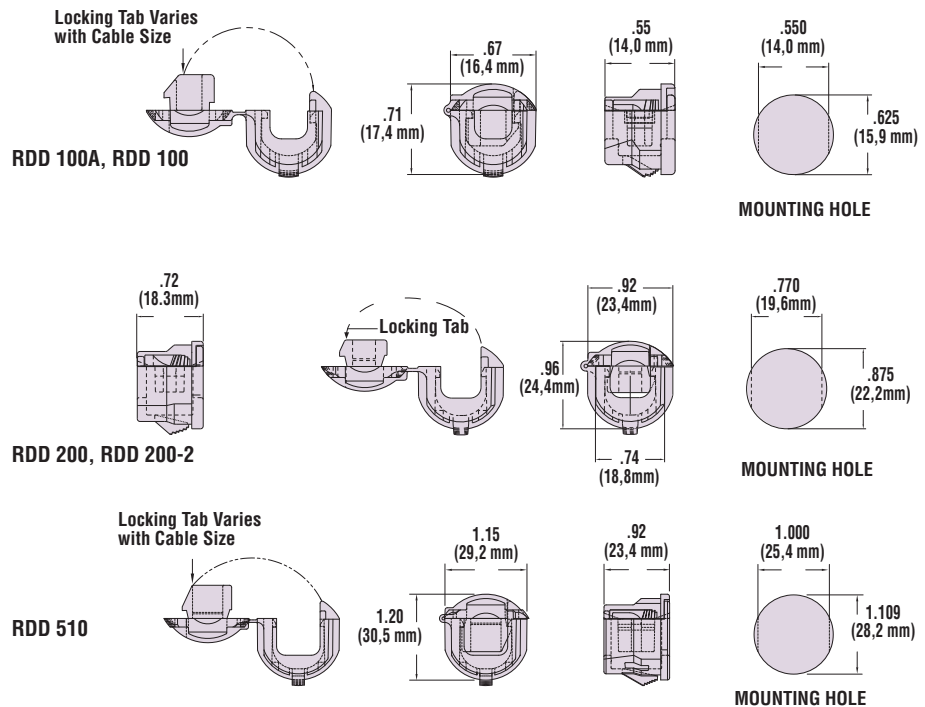

Material

Nylon 6/6

Certifications

 Recognized under the Component Program of Underwriters' Laboratories
File E15331

 Certified by the Canadian Standards Association File 8919

Flammability Rating

94V-2

Temperature Range

-.04°F (-18°C) to 221°F (105°C)

Quick

Specs

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

4-12